


PIT BULL® 412

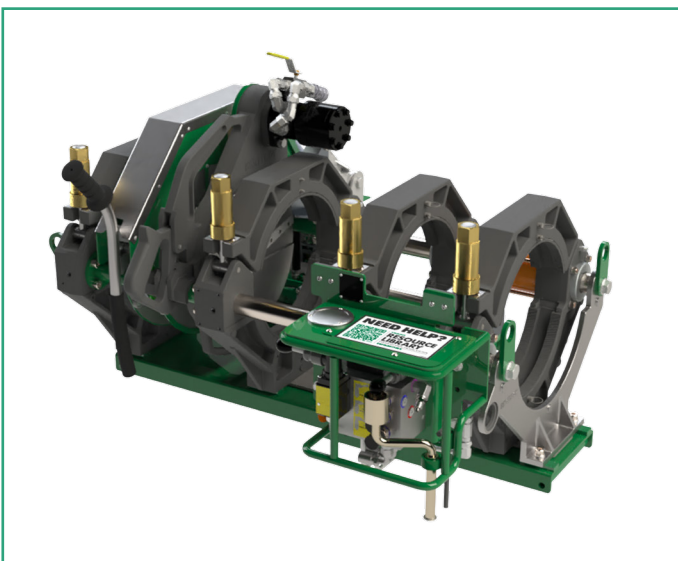

TECHNICAL SPECIFICATION:

Size range: 4" - 12" IPS

Piping & Materials:

**See Welding
Selection Chart**

*Ideal for Fluid-Lok® double contained
IPS HDPE and single wall HDPE*

Hydraulic Unit Power: 240V, 60Hz, 1Ph, 22Amp

Tool Carriage Dimensions: 44" x 43" x 29"
Tool Carriage Weight: 585 lbs.

Shipping Dimensions: Crate 1: 44" x 48" x 40"
Crate 2: 46" x 48" x 40"

Shipping Weight: Crate 1: 840 lbs.
Crate 2: 1010 lbs.

FEATURES:

- Patented Centerline Guidance System for equal distribution of force around the joint
- Industry standard semi-automatic hydraulic control system
- ISO-compliant industrial Teflon-coated plates
- Removable 3- or 4-jaw carriage for in-ditch use
- Serrated jaws and inserts keep pipe from slipping during fusion
- Powerful hydraulic facer for facing the toughest pipe with ease
- Hard-anodized aluminum wear surfaces for corrosion resistance
- DataLogger® compatible
- Microprocessor-controlled heater
- Thrust-bearing-equipped clamp knobs to minimize force required to clamp and round pipe

INCLUDES:

- 4", 6", 8", 10", and 12" IPS inserts
- Heater extension cord and extension hoses for remote welding
- Stub end (flange) holder

ABOUT THE PIT BULL® 412:

Pit Bull® 412 is the workhorse of the McElroy medium size machine line, fusing pipe with consistent and high quality results. This tool can be converted from a 4-jaw to a 3-jaw carriage for a more compact fusion unit, in the ditch or overhead.



TOOL PURCHASE PART NUMBER: 5725412MC
TOOL RENTAL PART NUMBER: 9725412MC

Powered by

